


## Synergy 21 LED Nachrüstsatz BA15s 4x1W ww



kwh/1000h:	4,00
Lumens:	440
Watt:	4,0
Nominal Service Life:	35000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature.:	25 °C

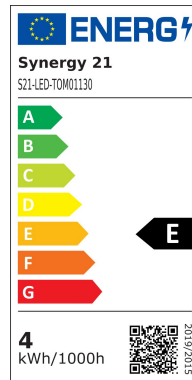

Socket: BA15s  
4x1Watt LEDs  
ALU housing  
Input: 12Vac / 12Vdc,  
Input range: 8-14Vac / 8-18Vdc  
Power consumption: 4 W  
Lumen: 400 lm  
Kelvin 3000  
Beam angle 60°  
Dimmable: yes  
DxH: 50mm\*60mm  
Can be used as a replacement for conventional halogen mirror lamps.

Colour: Warm white

### Caution:

Please only use regulated or switching power supply units with the Synergy 21 LED GX5.3/MR16 spots. Do NOT use halogen transformers or wound power supply units, otherwise there is a risk of the LED being destroyed by overvoltage.

Please be sure to measure the voltage beforehand.

We recommend using the Synergy 21 DM830 digital multimeter to measure the voltage.

Please note that Synergy21 LED retrofit lamps may only be operated at an operating temperature between 0-50 C°.

The service life of the LEDs cannot be guaranteed in the event of deviations!

Energy efficiency class: A++  
kWh/1000h: 4

## Attributes

Attribute	Value
Abstrahlwinkel:	60
CRI:	80
Dimmbar:	Ja
Lichtfarbe:	warmweiss
Lichtfarbe in Kelvin:	3000
Lumen:	400
Sockel:	BA15s
Weight:	0.1 Kg

## Additional Images





## Accessories

Part No.	Name
85498	Synergy 21 LED adapter / socket for LED lamps GX5.3 and G4
107727	HEP Power Supply - 12V 12W - HEP for Flush Mount Box