


## Synergy 21 LED recessed ceiling spotlight Helios black, square, warm white



kwh/1000h:	5,50
Lumens:	398
Watt:	5,0
Nominal Service Life:	35000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature.:	25 °C

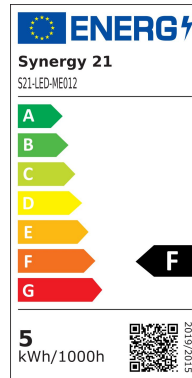

5 watt recessed ceiling spotlight  
Lamp body and cooler made of aluminium  
Stainless steel spring clip  
Surface-mounted housing for concrete ceilings or similar, see accessories

Housing colour: black  
Watt: 5Watt (CREE LED)  
Light colour: 2700K, CRI>90  
Luminous flux: 398 lm  
Beam angle: 36°  
Power supply: Constant current with 200mA and 22-26 Vdc (see accessories for power supply unit)  
Head diameter: 55 mm  
Total height: 16 mm  
Hole size: 45-55mm  
Dimmable: Yes via special power supply unit, see accessories

Energy efficiency class: G  
kWh/1000h: 5.5

## Attributes

Attribute	Value
-----------	-------

Abstrahlwinkel:	36
Ampere:	0.20
CC oder CV:	CC
CRI:	>90
Dimmbar:	abhängig vom Netzteil
Grösse:	55*55*16
LED - Gehäusefarbe:	schwarz
LED - Gehäusematerial:	Aluminium
Lichtfarbe:	warmweiß
Lichtfarbe in Kelvin:	3000
Lumen:	398
Schutzklasse:	IP20
Volt:	22-26
Weight:	0.2 Kg
Warranty:	60.00 Months

## Accessories

Part No.	Name
182388	Synergy 21 LED recessed ceiling spotlight Helios black, square, surface-mounted frame
182414	Synergy 21 LED recessed ceiling spot Helios power supply unit
178464	Synergy 21 Netzteil - CC Driver 200mA, 30~42V Osram Element S
232625	Synergy 21 LED Deckeneinbauspots Helios Netzteil DALI DIM SELF
234200	Synergy 21 Netzteil - CC Driver 200mA, 24~42V Osram Element G3
233581	Synergy 21 Netzteil - CC Driver 200mA, 24~42V Osram Element G4
167892	Synergy 21 Netzteil - CC Driver 200~1050mA, 35~115V Osram dali NFC
232389	Synergy 21 LED Deckeneinbauspots Helios Netzteil TRIAC dimmbar