

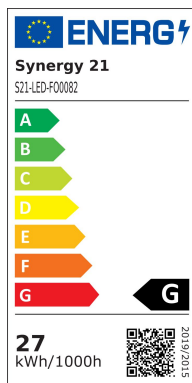


Synergy 21 LED Flex Strip 60 KW DC12V 24W IP65

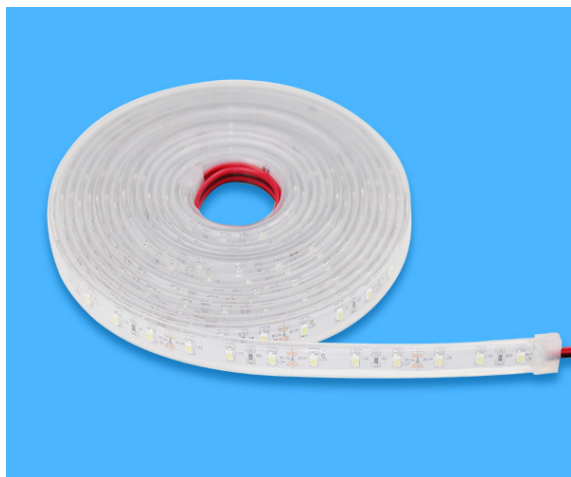

kwh/1000h:	27,00
Lumens:	1600
Watt:	24,0
Nominal Service Life:	35000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature.:	25 °C



Synergy 21 LED Flex Strip cold white DC12V, 24W, IP65

Voltage: 12V, max.2A
Watt: 24W±10%
Light colour: 6250K±250K cold white
Brightness: 1600lm
Beam angle: 120°
Protection class: IP62, silicone glue from top
LED quantity: 300*3528SMD
Dimensions: 5000*11*5 mm
PCB colour: white, open cable end
Operating temperature: -25°C to +40°C
Weight: 0.090 kg
Can be shortened every 3 LEDs

Energy efficiency class: A
kWh/1000h: 27

Strip can be shortened at the markings with sharp scissors.
!Attention! Strip must first be checked for functionality.
Only split the strip when there is no current.

Our 3M adhesive tape adheres well, but should only be used as a mounting aid.
There are a variety of mounting options, such as clips, permanently elastic mounting adhesive, cable ties, etc.

Please note that LED strips must also be cooled.

Make sure that the LED strip does not exceed a working temperature of 40°C, otherwise its service life cannot be guaranteed.

No guarantee can be given for overheated LED strips


Attributes

Attribute	Value
Abstrahlwinkel:	120
Ampere:	2
CC oder CV:	CV
CRI:	>80
Dimmbar:	abhängig vom Netzteil
LED Strip Klebeband:	ja
LED Strip Breite:	11
LED Strip Höhe:	5
LED Strip Klebeband:	ja
LED Strip kürzbar:	50
LED Strip Länge:	5000
Lichtfabe in Kelvin:	6250
Lichtfarbe:	kaltweiß
Lichtfarbe in Kelvin:	6250
Lichtfarbe Name:	kaltweiß
Lumen:	1600
Schutzklasse:	IP65
Volt:	12
Weight:	0.2 Kg


Additional Images



Front:

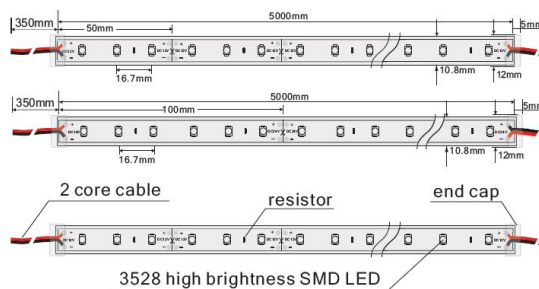

Lateral:

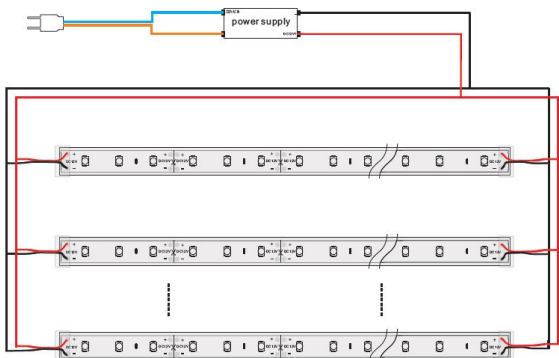



Accessories

Part No.	Name
81069	Synergy 21 LED zub Hollow Socket with Screw Terminals
81068	Synergy 21 LED zub wooden plug with screw terminals
81741	Synergy 21 LED Flex Strip add. Silicone mounting clip 10 pack
139522	Mean Well power supply - 12V 120W IP67