

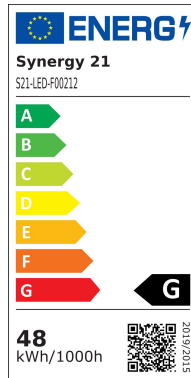


Synergy 21 LED flex strip 120 WW DC12V 48W IP68 CRI>90

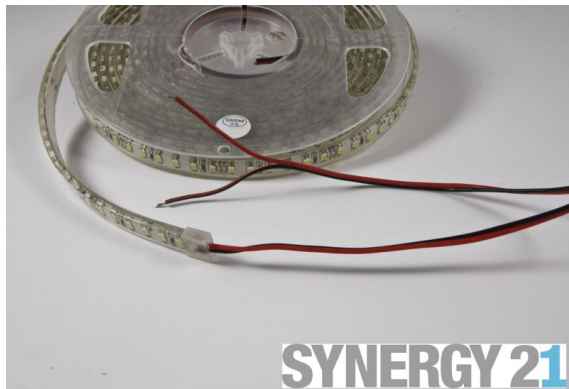

kwh/1000h:	48,00
Lumens:	3600
Watt:	48,0
Nominal Service Life:	35000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature.:	25 °C

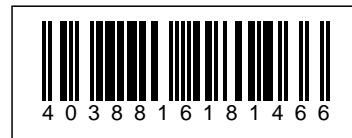

LED Flex Strip warm white, PCB white
DC12V, max. 4A, 48W \pm 10%,
600Leds, 120°, 3528SMD
Length: 5000*11*5mm
Lumen: 3600
3000K \pm 250
without adhesive tape
can be shortened every 3 LED
open cable end
outdoor, filled tube, IP68
Suitable up to -25°C!

Energy efficiency class: A+
kWh/1000h: 48
Strip can be shortened at markers with sharp scissors.
!Attention! Strip must be checked for functionality beforehand.
Only split the strip when there is no power.

Please note that LED strips must also be cooled.
Ensure that the LED strip does not exceed the working temperature of 40°C, otherwise the service life cannot be guaranteed.

Attributes

Attribute	Value
Abstrahlwinkel:	120
Ampere:	4
CC oder CV:	CV
CRI:	>90
Dimmbar:	abhängig vom Netzteil
LED Strip Klebeband:	nein
LED Strip Breite:	11
LED Strip Höhe:	5
LED Strip Klebeband:	nein
LED Strip kürzbar:	25
LED Strip Länge:	5000
Lichtfabe in Kelvin:	3000
Lichtfarbe:	warmweiß
Lichtfarbe in Kelvin:	3000
Lichtfarbe Name:	warmweiß
Lumen:	3600
Schutzklasse:	IP68
Volt:	12
Weight:	0.5 Kg
Warranty:	24.00 Months

Additional Images



Accessories

Part No.	Name
81069	Synergy 21 LED zub Hollow Socket with Screw Terminals
81068	Synergy 21 LED zub wooden plug with screw terminals
81741	Synergy 21 LED Flex Strip add. Silicone mounting clip 10 pack
78195	Synergy 21 Power supply unit - 12V 60W
79612	Synergy 21 LED power supply - 12V 60W
148726	Synergy 21 - Waterproof connector 1:1
148727	Synergy 21 - Waterproof connector 1:2
148730	Synergy 21 - Waterproof connector box 3 ports
148729	Synergy 21 - Waterproof connector box 3 ports transparent
148728	Synergy 21 - Waterproof connector box 4 ports
139522	Mean Well power supply - 12V 120W IP67