



## Synergy 21 LED Flex Strip add. Quick connector I

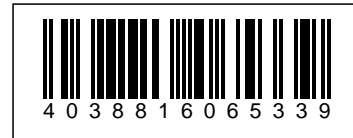

LED Strip quick wire splice connectors  
LED Strip quick wire splice connectors

Material: Polycarbonate + pure copper  
PU: 10 pieces (pack of 10)  
Rated voltage: 300V  
Rated current: 0-10A  
Working temp: -20°C ~ +80°C  
Max temp of the shell: +135°C  
Min temp of the shell: -45°C  
Size: 0.75 ~ 0.32 mm<sup>2</sup>

### Additional Images

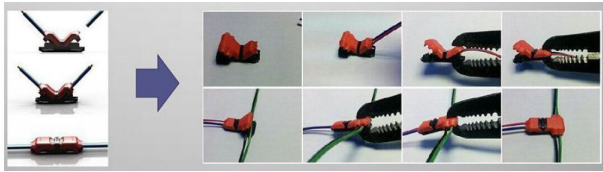

### Circuit Diagram

