

Synergy 21 LED flex strip 60 NW DC24V 24W IP20 CRI>90



kwh/1000h:	24,00
Lumens:	2160
Watt:	24,0
Nominal Service Life:	35000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature.:	25 °C



Voltage: 24V, max.1A
Watt: 24W±10%
Light colour: neutral white, 4000K
Brightness: 2160lm
CRI>90
Beam angle: 120°
Protection class: IP20
Number of LEDs: 300*3528SMD
Dimensions: 5000*8*3 mm
PCB colour: white, open cable end
Operating temperature: -25°C to +40°C
Weight: 0.090 kg
Can be shortened every 6 LEDs
Adhesive tape: yes 3M on the back

Energy efficiency class: A
kWh/1000h: 24

Strip can be shortened at the cut marks with sharp scissors.
!Attention! Strip must be checked for functionality beforehand.
Only split the strip when no current is present.



Our 3M adhesive tape adheres well, but should only be used as a mounting aid.
There are a variety of mounting options, such as clips, permanently elastic mounting adhesive, cable ties, etc.

Please note that LED strips must also be cooled.
Make sure that the LED strip does not exceed a working temperature of 40°C, otherwise its service life cannot be guaranteed.
No guarantee can be given for overheated LED strips

Attributes

Attribute	Value
Abstrahlwinkel:	120
Ampere:	1
CC oder CV:	CV
CRI:	>90
Dimmbar:	abhängig vom Netzteil
LED Strip Klebeband:	ja
LED Strip Breite:	8
LED Strip Höhe:	3
LED Strip kürzbar:	100
LED Strip Länge:	5000
Lichtfabe in Kelvin:	4000
Lichtfarbe:	neutralweiß
Lichtfarbe in Kelvin:	4000
Lichtfarbe Name:	neutralweiß
Lumen:	2160
Schutzklasse:	IP20
Volt:	24
Weight:	0.5 Kg
Warranty:	24.00 Months

Additional Images

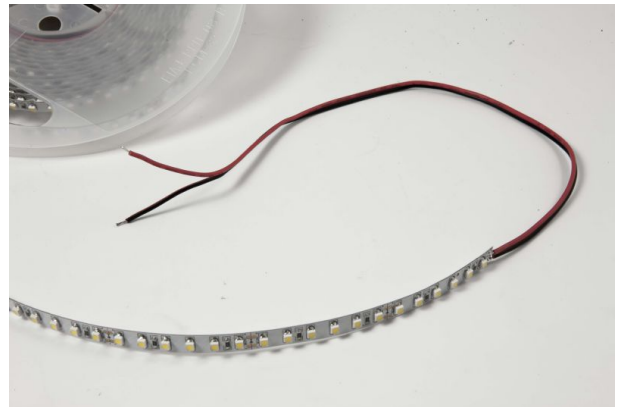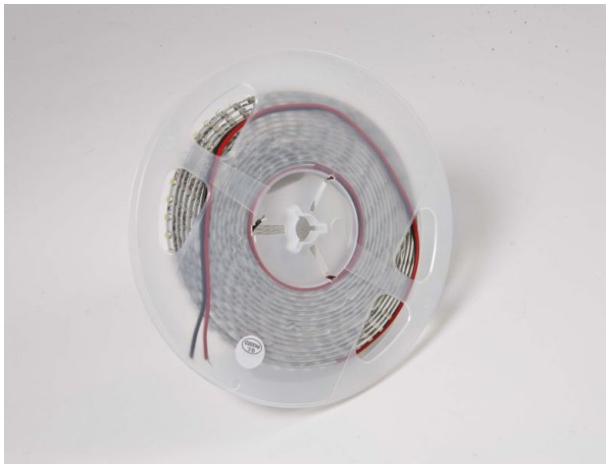

Accessories

Part No.	Name
81069	Synergy 21 LED zub Hollow Socket with Screw Terminals
81068	Synergy 21 LED zub wooden plug with screw terminals
81741	Synergy 21 LED Flex Strip add. Silicone mounting clip 10 pack
125198	Mean Well Power Supply - 24V 150W IP67
174020	Synergy 21 Power supply - 24V 100W BILTON