



Synergy 21 LED floodlighter 10W RGB-WW (RGB-CCT) IP65 24V *Milight/Miboxer*

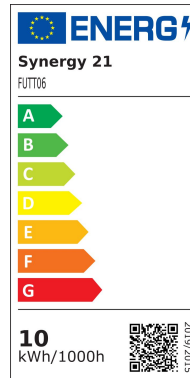

kwh/1000h:	10,00
Lumens:	850
Watt:	10,0
Nominal Service Life:	35000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature.:	25 °C



Discover the **Miboxer floodlight 10W RGB-CCT** with an impressive **160° beam angle** that adds new dimensions to your lighting. This powerful spotlight combines **10W power for white light** and **7.5W for RGB colours** to provide a **diverse colour palette** and **warm to cool white light** from **2700K to 6500K**.

The **Miboxer floodlight** operates with a voltage of **DC24V** and delivers a **light intensity of 750 to 900 lumens** with a light efficiency of **85LM/W**. With a **colour rendering index (CRI) of over 80**, this spotlight ensures **vivid and lifelike colours**, while the **power factor (PF) over 0.5** stands for efficient energy conversion. The spotlight has a **standby power consumption of just 0.5W**, which makes it particularly energy-efficient.

Thanks to its **IP65 protection**, the spotlight is **weatherproof and suitable for outdoor use**. The compact size of **10732166mm** allows for easy installation in various environments.

Control your lighting conveniently with a radio remote control or a WLAN controller, both available separately and available for **iOS and Android**. Optimise your lighting design with the **Miboxer floodlight** and enjoy a **flexible and customisable lighting solution** for your needs.

Miboxer flood spotlight 10W RGB-CCT with 160° beam angle

Controllable with wireless remote control and/or WLAN controller for iOS and Android, both available separately, see accessories

Power: 10W
White LED Power: 10W
RGB LED Power: 7.5W
Voltage: DC24V

Kelvin: 2700-6500K
Luminous Flux: 750-900LM
Luminous Efficiency: 85LM/W
Standby Power Consumption:0.5W
CRI: >80
PF: >0.5
Beam Angle: 160°
IP Rate:IP65
Size: 107*32*166mm

Energy efficiency class: A+
kWh/1000h: 10

Attributes

Attribute	Value
Abstrahlwinkel:	160
CC oder CV:	CV
Dimmbar:	Ja
Grösse:	107*32*166
LED - Gehäusematerial:	Aluminium
Lichtfarbe:	RGB-WW
Lichtfarbe in Kelvin:	2700~6500
Lumen:	750-900
Schutzklasse:	IP65
Volt:	24
Weight:	0.8 Kg

Additional Images

Accessories

Part No.	Name
147981	Synergy 21 LED remote RGB-WW (RGB-CCT) 8 zones *Milight/Miboxer*
147982	Synergy 21 LED remote RGB-WW (RGB-CCT) 4 zones *Milight/Miboxer*
148005	Synergy 21 LED remote smart panel RGB-WW (RGB-CCT) 4 zones *Milight/Miboxer*
148006	Synergy 21 LED remote smart panel RGB-WW (RGB-CCT) 8 zones *Milight/Miboxer*
181054	Synergy 21 LED remote WLAN controller *Milight/Miboxer*
148507	Synergy 21 LED remote WLAN controller smart light *Milight/Miboxer*
148726	Synergy 21 - Waterproof connector 1:1
148727	Synergy 21 - Waterproof connector 1:2
148730	Synergy 21 - Waterproof connector box 3 ports
148729	Synergy 21 - Waterproof connector box 3 ports transparent
148728	Synergy 21 - Waterproof connector box 4 ports
147265	Netzkabel 230V Schutzkontakt CEE7(Stecker)->Open End mit Adernendhülsen, 1,8m,Black