



## Synergy 21 LED-Flex-Streifen 70 WW DC24V 240W IP65 ULS 50m

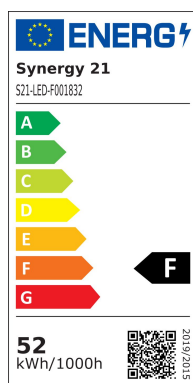

kwh/1000h:	52,80
Lumens:	3900
Watt:	48,0
Nominal Service Life:	35000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature.:	25 °C



Synergy 21 LED Flex Strip ULS Series  
ULS=Ultra Long Strip

Voltage: 24V,  
Watt: 240W  
CRI>80  
Light colour: warm white, 2400K  
Brightness: 3900lm  
Beam angle: 120°  
Protection class: IP65  
Number of LEDs: 70/m  
Dimensions: 50000\*10\*3 mm  
PCB colour: white, open cable end (360±5mm)  
Operating temperature: -25°C to +40°C  
Weight: 0.500kg  
Can be shortened every 7 LED 10cm  
Adhesive tape: yes 3M on the back

Energy efficiency class: A  
kWh/1000h: 52.8

Strip can be shortened at the cut marks with sharp scissors.  
!Attention! Strip must first be checked for functionality.  
Only split the strip when no current is present.



Our 3M adhesive tape adheres well, but should only be used as a mounting aid.  
There are a variety of mounting options, such as clips, permanently elastic mounting adhesive, cable ties, etc.

Please note that LED strips must also be cooled.  
Make sure that the LED strip does not exceed a working temperature of 40°C, otherwise its service life cannot be guaranteed.  
No guarantee can be given for overheated LED strips

## Attributes

Attribute	Value
Abstrahlwinkel:	120
Ampere:	10
CC oder CV:	CV
CRI:	>80
Dimmbar:	abhängig vom Netzteil
Grösse:	50000*10*3
LED - Gehäusefarbe:	weiss
LED Strip Klebeband:	ja
LED Strip Breite:	10
LED Strip Höhe:	3
LED Strip kürzbar:	100
LED Strip Länge:	50000
Lichtfabe in Kelvin:	2400
Lichtfarbe:	warmweiß
Lichtfarbe in Kelvin:	2400
Lichtfarbe Name:	warmweiß
Lumen:	3900
Schutzklasse:	IP65
Volt:	24
Weight:	0.5 Kg
Warranty:	60.00 Months

## Additional Images

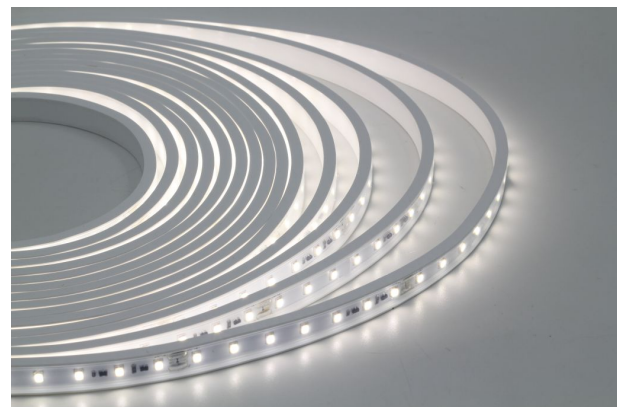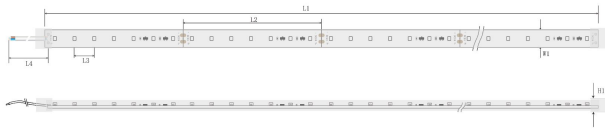



## Accessories

Part No.	Name
140930	Mean Well power supply - 48V 240W dimmable IP65