


## Synergy 21 LED floodlighter 100W RGB-WW (RGB-CCT) IP65 230V \*Milight/Miboxer\*



kwh/1000h:	100,00
Lumens:	8000
Watt:	100,0
Nominal Service Life:	35000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature.:	25 °C

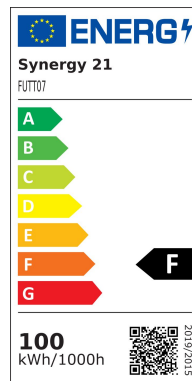

Experience the ultimate lighting solution with the **Miboxer 100W RGB+CCT LED Floodlight**. This powerful floodlight offers impressive light output and versatility, ideal for large areas such as gardens, car parks and facades.

The **Miboxer 100W RGB+CCT LED floodlight** can be controlled with a **radio remote control** and/or a **WLAN controller for iOS and Android**, both available separately. These control options allow flexible customisation of the lighting for the perfect atmosphere.

With an output of **100W** and a luminous flux of **7500-8500 lumens**, this floodlight offers exceptional brightness. The variable colour temperature from **2700K to 6500K** and the RGB+CCT function enable both warm and cool whites as well as a wide range of colours. The **light efficiency of 85LM/W** and a **colour rendering index (CRI) of over 80** ensure natural and vivid colour reproduction.

The **Miboxer 100W RGB+CCT LED floodlight** has a wide beam angle of **160°**, which ensures uniform light distribution. It is designed for an input voltage of **AC100~240V 50/60Hz** and has a standby power consumption of only **0.65W**, making it energy efficient. With **IP65 protection**, this floodlight is extremely resistant to water and dust, ideal for outdoor use. The robust construction and size of **295x60x402.32mm** ensure a long service life and reliable performance.

Experience the benefits of the **Miboxer 100W RGB+CCT LED floodlights** and improve the lighting of your indoor and outdoor areas.

Miboxer floodlight 100W RGB-CCT with 160° beam angle

Controllable with wireless remote control and/or WLAN controller for iOS and Android, both available separately,

open cable end see accessories


Product Name: 100W RGB+CCT LED Floodlight  
Model No.: FUTT07  
Power: 100W  
Voltage: AC100~240V 50/60Hz  
Kelvin: 2700-6500K  
Luminous Flux: 7500-8500LM  
Luminous Efficiency: 85LM/W  
Standby Power Consumption: 0.65W  
CRI: >80  
PF: >0.9  
Beam Angle: 160°  
IP Rate: IP65  
Size: 295\*60\*402.32mm

Energy Efficiency Class: F  
kWh/1000h: 100

## Attributes


Attribute	Value
Abstrahlwinkel:	160
Dimmbar:	Ja
Grösse:	295*60*402,32
LED - Gehäusematerial:	Aluminium
Lichtfarbe:	RGB-WW
Lichtfarbe in Kelvin:	2700~6500
Lumen:	7500-8500
Schutzklasse:	IP65
Volt:	230
Weight:	5 Kg
Warranty:	24.00 Months

## Additional Images

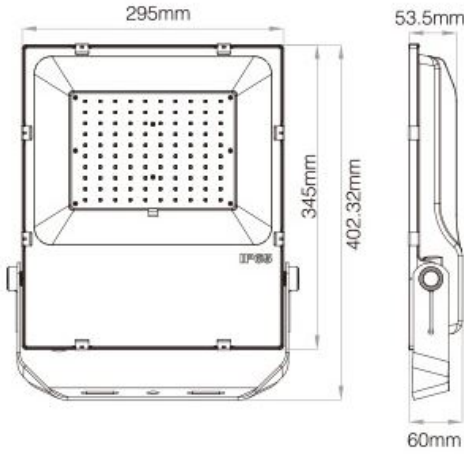

### Automatic Commands Transmitting Function

One floodlight can send the commands from the remote control to another, which makes the control distance limitless.  
(The distance from one light to another has to be within 30m)

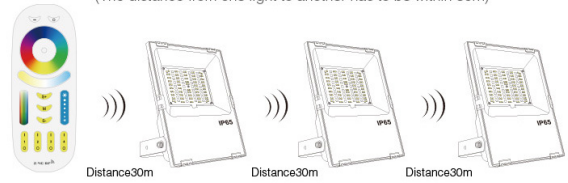

### Auto-synchronization

Different floodlight can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and with same speed.




### Control never like this convenient

2.4GHz remote control, cell phone APP control, enjoy the convenient life bring by technology.  
(+Need WiFi iBox for smartphone App control)




Compatible with




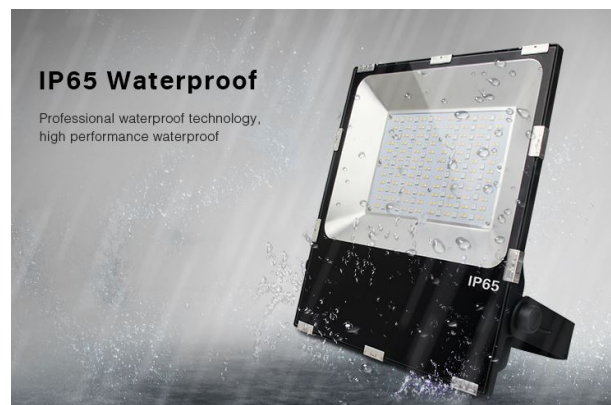

Application scene display

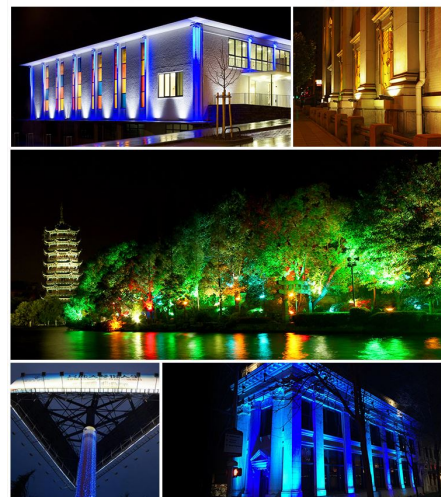

COMPATIBLE REMOTE SHEET

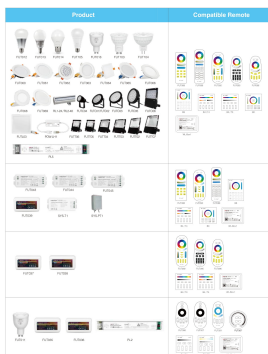

## Accessories

Part No.	Name
147981	Synergy 21 LED remote RGB-WW (RGB-CCT) 8 zones *Milight/Miboxer*
147982	Synergy 21 LED remote RGB-WW (RGB-CCT) 4 zones *Milight/Miboxer*
148005	Synergy 21 LED remote smart panel RGB-WW (RGB-CCT) 4 zones *Milight/Miboxer*
148006	Synergy 21 LED remote smart panel RGB-WW (RGB-CCT) 8 zones *Milight/Miboxer*
181054	Synergy 21 LED remote WLAN controller *Milight/Miboxer*
148507	Synergy 21 LED remote WLAN controller smart light *Milight/Miboxer*
148726	Synergy 21 - Waterproof connector 1:1
148727	Synergy 21 - Waterproof connector 1:2
148730	Synergy 21 - Waterproof connector box 3 ports
148729	Synergy 21 - Waterproof connector box 3 ports transparent
148728	Synergy 21 - Waterproof connector box 4 ports
147265	Netzkabel 230V Schutzkontakt CEE7(Stecker)->Open End mit Adernendhülsen, 1,8m,Black