


## Synergy 21 LED Retrofit E27 Glühbirne 5x1W kw 24V



|                            |            |
|----------------------------|------------|
| kwh/1000h:                 | 5,00       |
| Lumens:                    | 550        |
| Watt:                      | 5,0        |
| Nominal Service Life:      | 35000 Std. |
| Switching Cycles:          | 50000      |
| Opt. Ambient Temperature:. | 25 °C      |

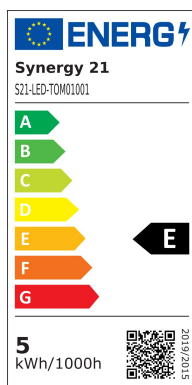

Base: E27  
Power: 5x1W  
Aluminium housing IP54  
Operating voltage: 24V  
Power consumption: 5 W  
Lumen: 550 ±10%  
Kelvin 6400-6600, cool white  
Dimmable: no  
Beam angle: 120°  
Operating temperature: 0-40°C  
Size: H:120mm, D: 55mm  
Can be used as a replacement for conventional light bulbs.

### Caution:

Please only use regulated or switching power supplies with Synergy 21 LED spots.  
Do NOT use halogen transformers or wound power supply units, otherwise there is a risk of the LED being destroyed by overvoltage.  
Please be sure to measure the voltage beforehand.  
We recommend using the Synergy 21 DM830 digital multimeter to measure the voltage.

Please note that the Synergy21 LED retrofit lamps may only be operated at an operating temperature between 0-40 C°. In the event of deviations, the service life of the LEDs cannot be guaranteed!

Energy efficiency class: A++  
kWh/1000h: 5

## Accessories

| Part No. | Name                                   |
|----------|--|
| 111328   | Synergy 21 LED socket E27 100cm blue   |
| 111332   | Synergy 21 LED socket E27 100cm yellow |
| 111327   | Synergy 21 LED socket E27 100cm orange |