


## Synergy 21 LED flex strips 60 RGB DC24V + RGB-W one chip SWW IP65



|                            |            |
|----------------------------|------------|
| kwh/1000h:                 | 90,00      |
| Lumens:                    | 1500       |
| Watt:                      | 90,0       |
| Nominal Service Life:      | 35000 Std. |
| Switching Cycles:          | 50000      |
| Opt. Ambient Temperature.: | 25 °C      |

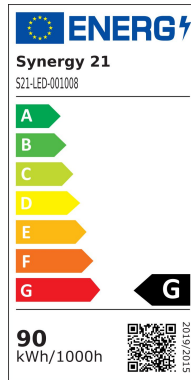

RGB-W Flex-Stripe, 5 metres, RGB and warm white on one chip  
 Warm white: 2500K  $\pm$ 250  
 IP65 with silicone tube  
 DC 24V, 90W, 25Watt ww, 65Watt RGB, 3.75A max.  
 Brightness: ww 1500lm  $\pm$  10%  
 300 PCS 5050 SMD LED  
 common positive pole  
 L\*W\*H: 5000\*12\*4.5  
 can be shortened: all 6 LEDs can be shortened (10 cm)  
 Adhesive tape for mounting aid on the back

Control via Portaluce controller or  
 RGBW controller (radio, DMX, etc.)

Please note that LED strips must also be cooled.  
 Make sure that the LED strip does not exceed the operating temperature of 40°C, otherwise the service life cannot be guaranteed.

## Attributes

| Attribute       | Value |
|-----------------|-------|
| Abstrahlwinkel: | 120   |

| Attribute            | Value                 |
|----------------------|-----------------------|
| Ampere:              | 3.80                  |
| CC oder CV:          | CV                    |
| Dimmbar:             | abhängig vom Netzteil |
| Länge:               | 5                     |
| LED Strip Klebeband: | ja                    |
| LED Strip Breite:    | 12                    |
| LED Strip Höhe:      | 4.50                  |
| LED Strip Klebeband: | ja                    |
| LED Strip kürzbar:   | 100                   |
| LED Strip Länge:     | 5000                  |
| Lichtfarbe:          | RGB-W                 |
| Lichtfarbe Name:     | RGB-W                 |
| Schutzklasse:        | IP65                  |
| Volt:                | 24                    |
| Weight:              | 0.2 Kg                |
| Warranty:            | 24.00 Months          |

## Accessories

| Part No. | Name  |
|----------|---|
| 135731   | Synergy 21 LED Controller 3653 LED RGB-WW (RGB-CCT) Master Set                            |
| 81069    | Synergy 21 LED zub Hollow Socket with Screw Terminals                                     |
| 81068    | Synergy 21 LED zub wooden plug with screw terminals                                       |
| 81741    | Synergy 21 LED Flex Strip add. Silicone mounting clip 10 pack                             |
| 125198   | Mean Well Power Supply - 24V 150W IP67  |
| 151666   | Synergy 21 LED Controller EOS 05 5-channel controller RGB-WW (RGB-CCT)                    |
| 151667   | Synergy 21 LED Controller EOS 05 5-channel hand-held transmitter 4 zones RGB-WW (RGB-CCT) |
| 126644   | Synergy 21 LED Controller EOS 05 Wall switch AC RGB-W                                     |
| 101873   | Synergy 21 LED Controller EOS 05 Wall switch RGB-W  |

| Part No. | Name   |
|----------|--|
| 178378   | Synergy 21 LED Controller EOS 07 DALI DT8 RGB/W  |
| 178440   | Synergy 21 LED Controller EOS 10 ZigBee 5-channel controller RGB-WW (RGB-CCT)                |
| 178421   | Synergy 21 LED Controller EOS 10 ZigBee CC Controller+Netzteil 4-Kanal 75W RGB-W             |
| 178432   | Synergy 21 LED Controller EOS 10 ZigBee CV Controller+power supply 4-channel 100W RGB-W 12V  |
| 178433   | Synergy 21 LED Controller EOS 10 ZigBee CV Controller+power supply 4-channel 100W RGB-W 24V  |
| 149146   | Synergy 21 LED Controller RGB-W DC12/24V *Milight/Miboxer*                                   |
| 181495   | Synergy 21 LED controller RGB-W DC12/24V *Milight/Miboxer*                                   |
| 149147   | Synergy 21 LED Controller RGB-WW (RGB-CCT) DC12/24V *Milight/Miboxer*                        |
| 181496   | Synergy 21 LED Controller RGB-WW (RGB-CCT) DC12/24V *Milight/Miboxer*                        |
| 148143   | ynergy 21 LED Controller RGB-WW (RGB-CCT) DC12/24V Strip/Panel 5in1*Milight/Miboxer*         |
| 178064   | Synergy 21 LED controller RGB-WW (RGB-CCT) DC12/24V strip/panel 5in1*Milight/Miboxer*        |
| 180638   | Synergy 21 LED Controller RGB-WW (RGB-CCT) DC12/24V WiFi 5in1*Milight/Miboxer* Alexa serieAs |
| 159228   | Synergy 21 LED controller+power supply 24V/100W RGB-WW (RGB-CCT) *Milight/Miboxer*           |
| 183258   |  |