


Synergy 21 LED object spotlight 140W IP52 nw V2



SYNERGY 21

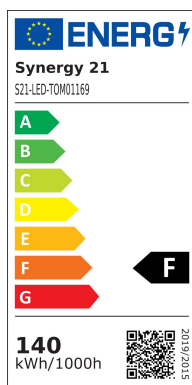

kwh/1000h:	140,00
Lumens:	12600
Watt:	140,0
Nominal Service Life:	35000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature.:	25 °C



With emergency power function (from 80V approx. 20% brightness) and reversible overheating protection (active thermal derating)
Dimmable (leading edge and trailing edge phase dimmer)
Toughened safety glass
Stainless steel mounting plate
H05RNF cable
PF>90%
Operating voltage: > AC 207-253V
LED: 2*70Watt Highpower Chip
Power supply: 2 internal high-power power supplies
Beam angle: 120°
Lumen: 13300lm
Efficiency: 95Lm/Watt
Neutral white: 4500K ±250
CRI: Ra>80
Dimmable: yes (leading edge and trailing edge phase control dimmer)
Housing: Injection-moulded aluminium in black
Front glass: toughened safety glass (ESG)
Operating temperature: -25°C to +55°C
Protection class: IP52, not suitable for outdoor use
Weight: 11.5kg
Dimensions: 60*29*21.7 cm (12 cm without bracket)

Energy efficiency class: A+
kWh/1000h: 140

Accessories

Part No.	Name
148726	Synergy 21 - Waterproof connector 1:1
148727	Synergy 21 - Waterproof connector 1:2
148730	Synergy 21 - Waterproof connector box 3 ports
148729	Synergy 21 - Waterproof connector box 3 ports transparent
148728	Synergy 21 - Waterproof connector box 4 ports
134568	Finder motion detector IP55
113414	Finder motion detector IP54
82434	Finder Twilight Switch suitable for Synergy 21 LED outdoor spotlight
147265	Netzkabel 230V Schutzkontakt CEE7(Stecker)->Open End mit Adernendhülsen, 1,8m,Black